




SAP-230: Push-In FlexiPlugs for Pipe Ends

Speed-Fit. Single Push-Fit application and accurate fitting
Multi-purpose Flexible Plugs to protect all types of exposed pipe ends

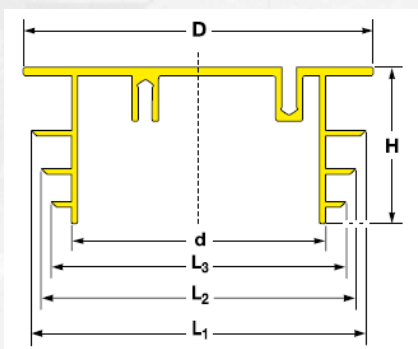

Description

Real Protection's Push-In FlexiPlugs are made of low density polyethylene(LLD-PE). These caps are easy to fit and to remove, with BLUE as the standard color.

Quality:

Using just one plug. Best choice to cover a large range of ID's and hole sizes with just one Flexible Plug. New Advantage. Push-Fit Design provides easy application to pipes being racked for storage or transport.

Availability: we provide the fastest on time delivery service to all industries.

Philosophy: Innovative protective closures at the best price in the market.

Alle dimensions in mm



Pipe Dimensions			Plug-Dimensions						Standard Pack	Reference No.
Ø ext.	Ø int.		D	L ₁	L ₂	L ₃	d	H		
D	min.	max.	Falge	rib	rib	rib	shaft	depth		
21.3	14.0	19.0	21.0	19.7	17.3	14.9	91	28.0	6.000	SAP 230 / L 21.3
25.0	18.0	25.0	24.3	25.3	22.2	20.0	15.0	28.0	5.000	SAP 230 / L 25.0
30.0	24.0	29.0	29.2	30.0	27.7	26.4	18.0	28.0	3.000	SAP 230 / L 30.0
38.0	28.0	37.0	37.6	38.3	35.2	32.0	22.5	31.6	2.000	SAP 230 / L 38.0
42.1	36.0	42.0	42.0	43.5	41.8	38.2	28.2	31.4	1.500	SAP 230 / L 42.1
50.0	42.0	50.0	49.8	50.4	47.2	44.0	34.5	31.3	1.000	SAP 230 / L 50.0
57.0	49.0	57.0	55.8	56.8	56.6	49.9	41.1	31.8	800	SAP 230 / L 57.0
63.5	55.0	63.0	62.5	63.5	59.0	55.5	48.0	32.0	700	SAP 230 / L 63.5
70.0	62.0	69.0	68.5	70.0	67.9	62.0	55.0	32.0	500	SAP 230 / L 70.0
76.0	69.0	75.0	75.0	75.5	73.0	69.0	60.0	32.0	400	SAP 230 / L 76.0
85.0	73.0	81.0	82.5	81.5	79.0	76.0	66.0	31.3	350	SAP 230 / L 85.0
88.9	82.0	88.0	88.6	87.4	84.4	80.5	72.2	31.7	300	SAP 230 / L 88.9
95.0	85.0	94.0	94.5	95.0	90.0	88.0	78.0	32.0	300	SAP 230 / L 95.0
101.6	93.0	101.0	101.6	110.0	96.5	93.5	85.0	31.7	250	SAP 230 / L 101.6
108.0	98.0	107.0	108.0	107.0	103.0	98.6	91.0	31.5	200	SAP 230 / L 108.0
114.3	90.0	110.0	113.0	112.0	-	112.0	80.0	38.0	175	SAP 230 / L 114.3
121.0	97.0	117.0	120.0	117.0	-	118.4	88.5	38.1	150	SAP 230 / L 121.0
127.0	102.0	123.0	125.0	125.3	-	124.0	93.5	38.0	150	SAP 230 / L 127.0
133.0	110.0	129.0	132.0	128.7	-	131.0	100.3	37.8	125	SAP 230 / L 133.0
139.7	113.0	133.0	138.0	135.2	-	134.2	102.0	38.0	125	SAP 230 / L 139.7
146.0	126.0	144.0	146.6	145.0	-	145.0	116.0	38.4	110	SAP 230 / L 146.0
152.4	132.0	148.0	151.5	151.5	-	151.0	122.5	38.0	100	SAP 230 / L 152.4
159.0	139.0	154.0	158.8	155.0	-	156.1	128.5	37.4	90	SAP 230 / L 159.0
165.1	145.0	161.0	164.0	165.0	-	161.5	135.0	38.0	75	SAP 230 / L 165.1
168.3	145.0	161.0	167.0	165.0	-	162.0	136.0	38.0	75	SAP 230 / L 168.3
177.8	157.0	175.0	177.0	176.0	-	176.0	146.0	38.0	65	SAP 230 / L 177.8

Should your requirements not be shown please ask for a separate quotation.