



SAP-434: Threaded Sealing Plugs, HD-PE.

Designed to protect unified / straight threaded ports
 DIN EN ISO 228 - 1 • metric • UN/UNF

Description



Real Protection's Threaded Sealing Plugs are made of high density polyethylene(HD-PE). These caps are easy to fit and to remove, with RED as the standard color.

Quality: To protect unified/straight threaded ports and fittings according to DIN 3852-1 Metric, ISO 6149-1 BSP, SAE J 1926 UN/UNF. Each plug features an integrated tight fit sealing lip along with five complete threads. The plug design stops contaminants from entering, while preventing fluids from escaping. SAP 434 plugs can be fitted and removed with a screwdriver, socket wrench, power tool or by hand

Availability: we provide the fastest on time delivery service to all industries.

Philosophy: Innovative protective closures at the best price in the market.

Alle dimensions in mm

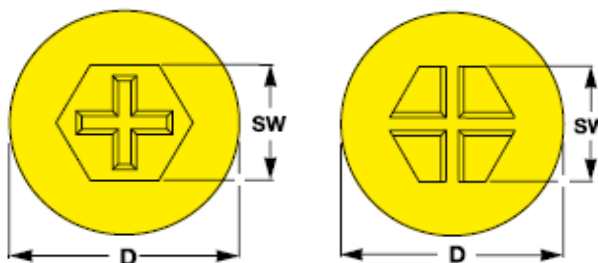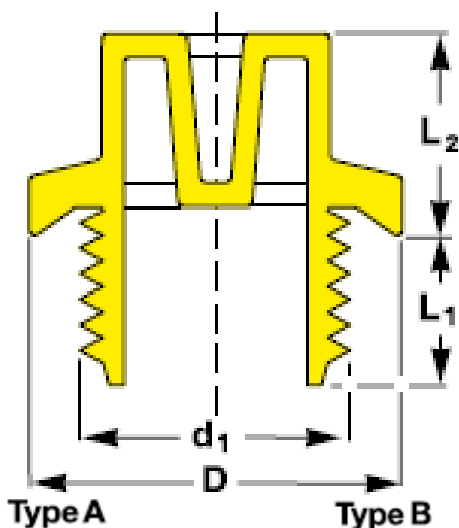

DIN EN ISO 228 - 1 / DINE 3852 - 2

Thread Size	Flange	Total Height		Spanner Size	Type	Reference No.
		Thread Length	Head Length			
d_1	D	L_1	L_2	SW		
G 1/8	16.5	7.5	11.2	13.0	A	SAP 434 - 1/8"
G 1/4	18.9	7.5	11.3	13.0	A	SAP 434 - 1/4"
G 3/8	21.8	7.5	2.2	17.0	A	SAP 434 - 3/8"
G 1/2	26.3	10.6	14.7	19.0	A	SAP 434 - 1/2"
G 3/4	32.0	10.5	14.5	24.0	A	SAP 434 - 3/4"
G 1	29.2	13.6	15.8	27.0	B	SAP 434 - 1"
G 1 1/4	49.5	13.5	17.5	36.0	B	SAP 434 - 1 1/4"
G 1 1/2	54.5	13.5	16.5	41.0	B	SAP 434 - 1 1/2"
G 2	67.5	13.5	16.4	55.0	B	SAP 434 - 2"

Metric DIN 3852 - 1 / DIN ISO 6149 - 1

M 10 x 1	13.9	5.5	11.5	10.0	B	SAP 434 - M10x1
M 12 x 1.5	16.9	8.2	11.5	13.0	A	SAP 434 - M12x1.5
M 14 x 1.5	18.9	8.5	11.5	13.0	A	SAP 434 - M14x1.5
M 16 x 1.5	21.6	8.4	11.3	17.0	A	SAP 434 - M16x1.5
M 18 x 1.5	23.5	8.3	13.6	17.0	A	SAP 434 - M18x1.5
M 20 x 1.5	25.6	8.5	15.5	19.0	A	SAP 434 - M20x1.5
M 22 x 1.5	26.9	7.8	15.9	19.0	A	SAP 434 - M22x1.5
M 24 x 1.5	31.0	10.6	14.9	24.0	A	SAP 434 - M24x1.5
M 26 x 1.5	31.4	8.5	15.5	24.0	A	SAP 434 - M26x1.5
M 27 x 2	31.9	11.5	15.9	24.0	A	SAP 434 - M27x2
M 33 x 2	39.3	11.5	15.6	27.0	B	SAP 434 - M33x2
M 42 x 1.2	49.1	11.5	16.6	36.0	B	SAP 434 - M42x2

ISO 11926 - 1

7/16 - 20 UNF	10.0	10.0	10.2	13.0	A	SAP 434 - 7/16 - 20 UNF
1/2 - 20 UNF	9.6	9.6	11.3	13.0	A	SAP 434 - 1/2 - 20 UNF
9/16 - 18 UNF	9.5	9.5	11.3	13.0	A	SAP 434 - 9/16 - 18 UNF
5/8 - 18 UNF	10.5	10.5	13.2	17.0	A	SAP 434 - 5/8 - 18 UNF
3/4 - 16 UNF	8.9	8.9	14.0	17.0	A	SAP 434 - 3/4 - 16 UNF
7/8 - 14 UNF	12.5	12.5	13.0	19.0	A	SAP 434 - 7/8 - 14 UNF
1 1/16 - 12 UN	12.5	12.5	13.4	24.0	A	SAP 434 - 1 1/16 - 12 UN
1 5/16 - 12 UN	13.5	13.5	16.5	27.0	A	SAP 434 - 1 5/16 - 12 UN
1 5/8 - 12 UN	15.7	15.7	16.3	36.0	A	SAP 434 - 1 5/8 - 12 UN
1 5/8 - 16 UN	15.8	15.8	16.6	36.0	A	SAP 434 - 1 5/8 - 16 UN

Should your requirements not be shown please ask for a separate quotation.