

Threaded sealing plug design SAP 436 complete with washer provides an outstanding seal force useable under complicated working conditions.



Description



Real Protection's Threaded Sealing Plugs are made of premium, impact resistant Nylon. These plugs has yellow as standard color

Quality: Body design. For particularly high demands on tightness with additional foactory-made fitting of an neoprene rubber sealing washer. Exist in a wide range of metric, whitworth and UNF thread types.

Availability: We provide the fastest on time delivery service to all industries.

Philosophy: Innovative protective closures at the best price in th market.

Alle dimensions in mm

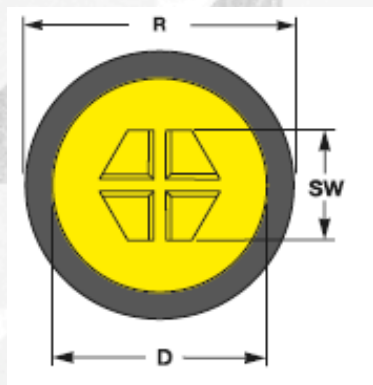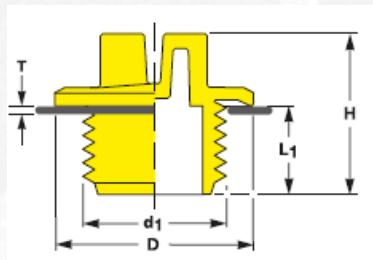

Metric DIN 3852-1 / DIN ISO 6149-1. Type Yewllow

| Thread Size | Flang | Thread Length | Head Height | Spanner Size | Washer | | Reference No. |
|-------------|-------|---------------|-------------|--------------|--------|------|--------------------|
| | | | | | T | R | |
| M 10 x 1 | 15.4 | 8.0 | 15.0 | 7 | 1.0 | 16.5 | EP 438 -M 10 x 1 |
| M 12x 1.5 | 18.5 | 9.0 | 16.5 | 10 | 1.0 | 19.9 | EP 438 -M 12 x 1.5 |
| M 14 x 1.5 | 20.3 | 9.0 | 17.0 | 10 | 1.0 | 21.5 | EP 438 -M 14 x 1.5 |
| M 16 x 1.5 | 23.6 | 10.0 | 20.0 | 13 | 1.0 | 24.5 | EP 438 -M 16 x 1.5 |
| M 18 x 1.5 | 25.5 | 11.0 | 20.6 | 13 | 1.0 | 26.5 | EP 438 -M 18 x 1.5 |
| M 22 x 1.5 | 28.4 | 12.2 | 21.7 | 15 | 1.0 | 29.5 | EP 438 -M 22 x 1.5 |
| M 27 x 2 | 33.4 | 15.0 | 25.0 | 19 | 1.0 | 34.5 | EP 438 -M 27 x 2 |
| M 30 x 2 | 35.9 | 10.0 | 10.0 | 24 | 1.0 | 37.0 | EP 438 -M 30 x 2 |
| M 33 x 2 | 42.5 | 15.0 | 25.0 | 24 | 1.0 | 43.5 | EP 438 -M 33 x 2 |
| M 36 x 2 | 44.1 | 10.0 | 20.0 | 24 | 1.0 | 47.0 | EP 438 -M 36 x 1.5 |
| M 42 x 2 | 51.3 | 15.0 | 26.0 | 24 | 1.0 | 52.5 | EP 438 -M 42 x 1.5 |
| M 45 x 2 | 54.9 | 14.6 | 27.5 | 30 | 1.0 | 56.0 | EP 438 -M 45 x 1.5 |
| M 48 x 2 | 56.7 | 17.0 | 28.0 | 30 | 1.0 | 57.5 | EP 438 -M 48 x 1.5 |
| M 52 x 2 | 60.5 | 17.0 | 27.7 | 30 | 1.0 | 61.0 | EP 438 -M 30 x 52 |

ISO 11926-1. Type Natural

| | | | | | | | |
|-----------------|------|------|------|----|-----|------|--------------------------|
| 1 7/16 - 20 UNF | 18.5 | 9.2 | 16.0 | 10 | 1.0 | 18.5 | EP 438 - .7/16" - 20 UNF |
| 19/16 - 18 UNF | 21.4 | 10.0 | 18.0 | 10 | 1.0 | 22.5 | EP 438 - .9/16" - 18 UNF |
| 3/4 - 16 UNF | 27.3 | 11.0 | 21.0 | 13 | 1.0 | 28.0 | EP 438 - .3/4" - 16 UNF |
| 7/8 - 4 UNF | 30.5 | 13.0 | 23.0 | 15 | 1.0 | 31.5 | EP 438 - .7/8" - 12 UN |
| 1 1/16 - 12 UN | 38.2 | 15.0 | 25.0 | 19 | 1.0 | 39.0 | EP 438 - 1.1/16" - 12 UN |
| 1 5/16 - 12 UN | 44.8 | 15.0 | 25.0 | 24 | 1.0 | 46.0 | EP 438 - 1.5/16" - 12 UN |
| 1 5/8 - 12 UN | 56.0 | 15.0 | 26.0 | 30 | 1.0 | 61.0 | EP 438 - 1.5/8" - 12 UN |
| 1 7/8 - 12 UN | 63.7 | 15.0 | 26.0 | 30 | 1.0 | 64.5 | EP 438 - 1.7/8" - 12 UN |

Should your requirements not be shown please ask for a separate quotation.